
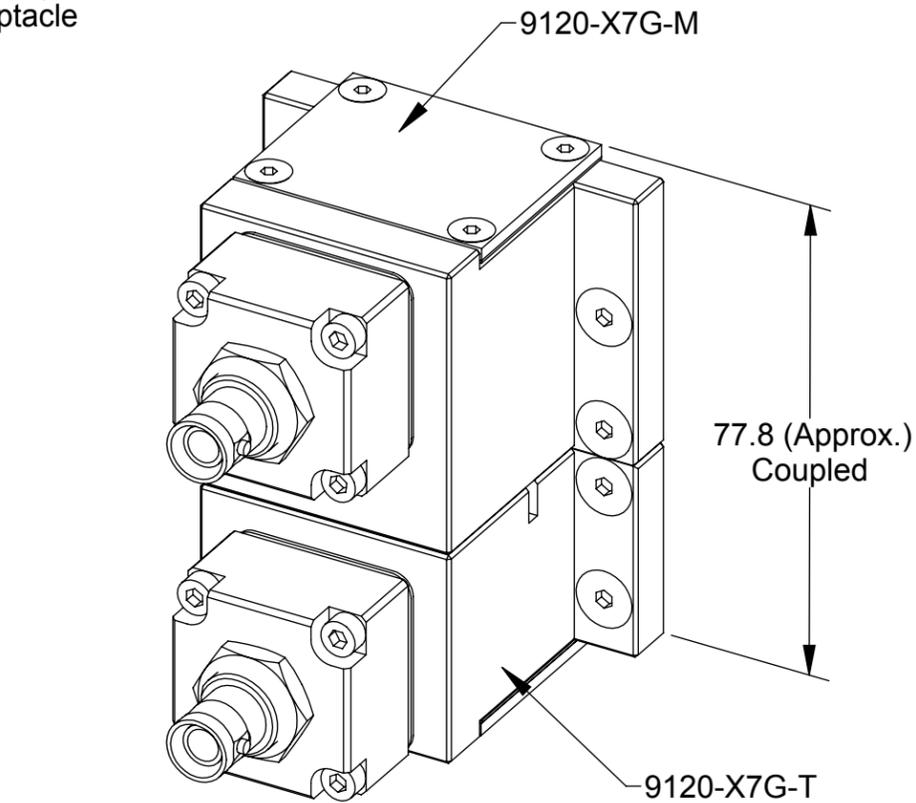


"DANGER!" - Electrical Shock Hazard

This module has a Voltage of 50V or greater, NO contact should be attempted before removing power. This especially includes separation or insertion of the mating connectors or any contact with the tool changer or its components.


Rev.	Description	Initiator	Date
02	Eco 15774; Updated Connector Description. Rotated Tool Side View 180°. Updated Electrical Shock Note. Updated Notes.	CF	6/13/2017

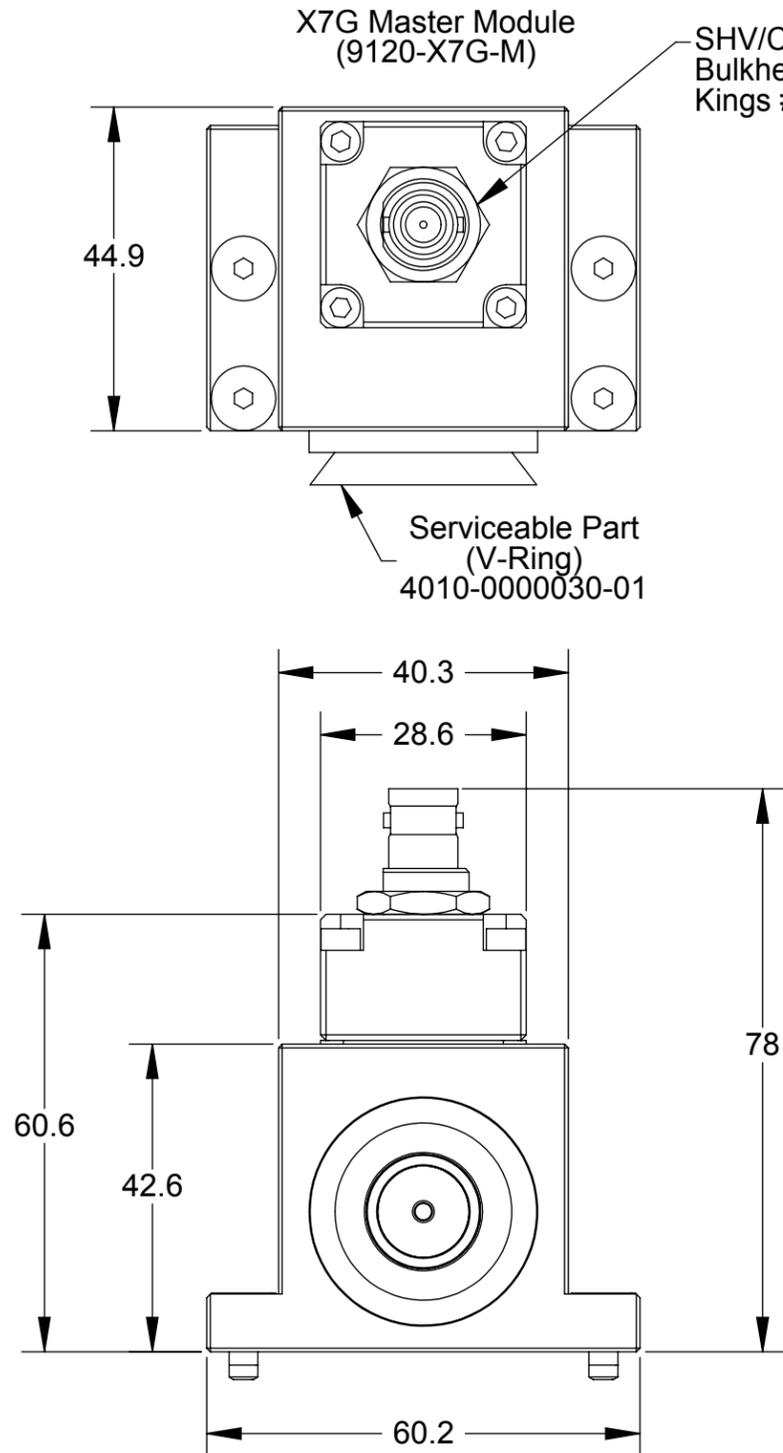

X7G Wiring

X7G-M SHV BNC ----->----- X7G-T SHV BNC


(Straight Through)
(Discrete Wires)
(Shield Isolated From Chassis)

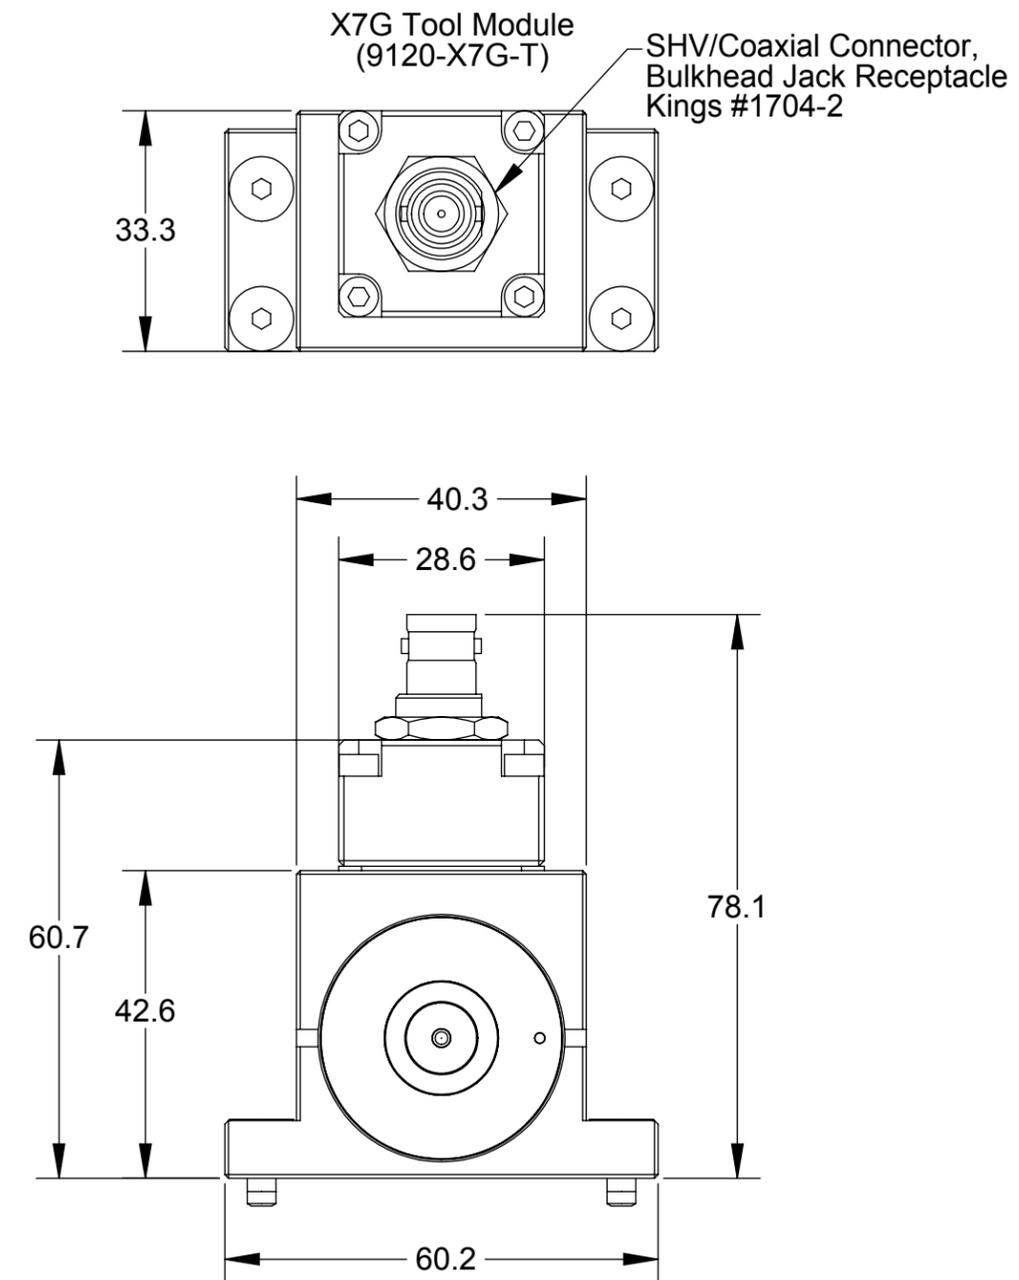

- Notes:
- Internal wiring: Discrete Wires.
 - Connector Shield Isolated from Chassis Ground.

NOTES: UNLESS OTHERWISE SPECIFIED.

DO NOT SCALE DRAWING. ALL DIMENSIONS ARE IN MILLIMETERS.



1031 Goodworth Drive, Apex, NC 27539, USA
 Tel: +1.919.772.0115 Email: info@ati-ia.com
 Fax: +1.919.772.8259 www.ati-ia.com
 ISO 9001 Registered Company

PROPERTY OF ATI INDUSTRIAL AUTOMATION, INC. NOT TO BE REPRODUCED IN ANY MANNER EXCEPT ON ORDER OR WITH PRIOR WRITTEN AUTHORIZATION OF ATI.

DRAWN BY: D. Swanson, 8/27/09		TITLE	
CHECKED BY: DKL/DTM, 9/14/09		Ultrasonic Weld Module w/ Isolated Connector	
PROJECT # 090821-1	SHEET 1 OF 1	SCALE 1:1	REVISION 02
SIZE B	DRAWING NUMBER 9630-20-X7G		